




This information sheet discusses how a higher level of power outages coupled to an extended period of outage will affect the selection of residential power systems. Not all residential sets are designed for continuous operation. The user and system designer should be aware of the requirements of a set that may have to run longer than 24 hours.

1.0 INTRODUCTION:

As electrical demand rises and more utility companies operate at or near maximum output, we can expect to experience more frequent and wide-spread blackouts and brownouts. In addition, forecasters predict a higher incidence of weather-related power outages as changing global temperatures cause more frequent severe weather events, such as ice, snow and wind.

The diagram below details the arrangement for a typical residential generator standby system. The chart on page 2 summarizes the factors that should be taken into consideration when selecting a residential set for extended power outages. (Continued over)

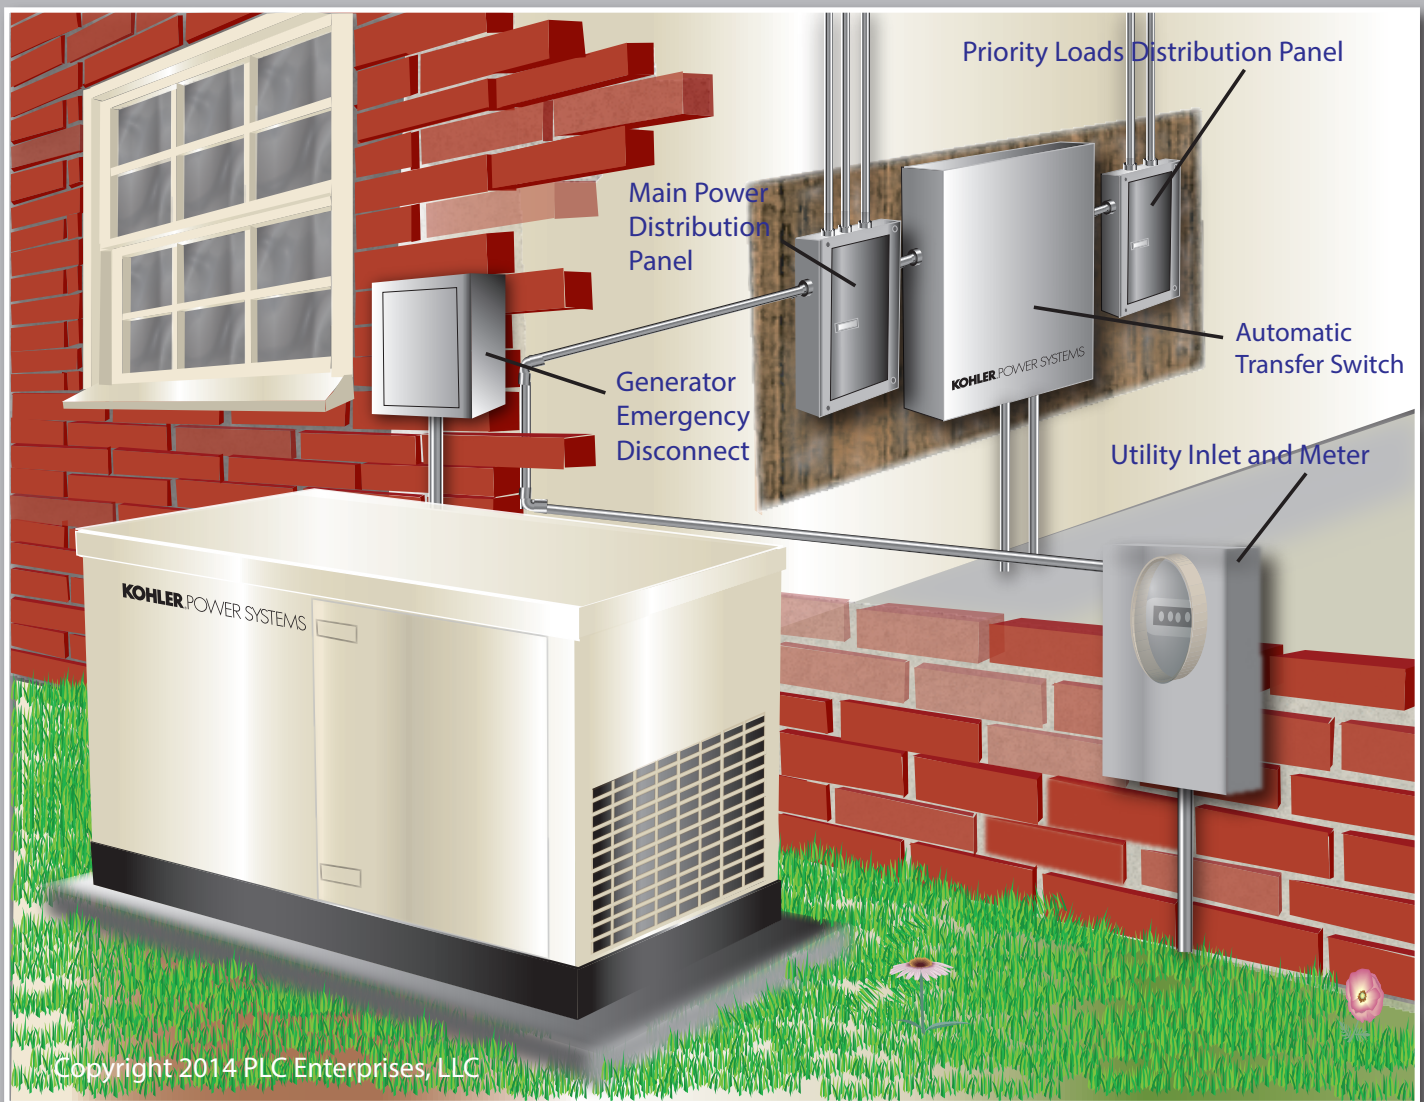

Copyright 2014 PLC Enterprises, LLC

The installation information provided in this information sheet is informational in nature only, and should not be considered the advice of a properly licensed and qualified electrician or used in place of a detailed review of the applicable National Electric Codes and local codes. Specific questions about how this information may affect any particular situation should be addressed to a licensed and qualified electrician.

2.0 RESIDENTIAL GENERATOR OPTIONS:

The residential generator set market can be split into two basic categories, 3,600 rpm and 1,800 rpm models.

3,600 rpm - Generator sets running at 3,600 rpm are coupled to 2-pole generator ends. A 3,600 set is more compact, incorporating an engine commonly found in lighter duty consumer applications such as lawn mowers and snow blowers. A 2-pole set relies on speed to attain the maximum power out of a smaller cube. Increased speed means the engine is under greater stress, which results in less hours between maintenance cycles. Increased speed also results in higher frequency vibration that has to be isolated from the residence.

1,800 rpm - Generator sets running at 1,800 rpm are coupled to 4-pole generator ends. Engines designed to operate at lower speeds are primarily for industrial heavy-duty applications. The lower speed ensures longer periods of operation between maintenance cycles such as oil and filter changes. Lower speed results in less vibration and noise. 4-pole generator ends usually have a better wave form and closer voltage regulation than 2-pole machines.

Factors in Selecting a Residential Set to Run Unattended in Outages Exceeding 120 Hours			
Specification	Type	Advantage	Disadvantage
Fuel N.B. The home owner has to ensure there is sufficient fuel for the set to run for 120 hours	Gasoline	Readily Available	Dangerous to Store
		Does not gel at low temps	CO gas poisoning risk
	LPG/Natural Gas	120h capacity LPG tanks	
		Already in residential use	
	Diesel 1,800 rpm	Greater fuel efficiency	Gels without additives
		Less volatile than gas	
Oil and Filter Changes	3,600 rpm		Oil change every 30 hours
			Filter replacement 30 hrs
	Diesel/LPG/NG	Oil will last for 1000 hrs	
Recommended Residential Set for Outages Exceeding 120 Hours			
Application for generator	2-Pole 3,600 rpm	4-Pole 1,800 rpm	
Short duration power outages under 24 -hours	Yes	Yes	
Purchase Cost per kW	Lowest	Higher	
Quality of voltage and wave form	Lower	Higher	
Power outages of several days	Unsuitable	Recommended	
Life of equipment (based on areas prone to outages)	Lowest	Highest	

3.0 THE IMPORTANCE OF REGULAR MAINTENANCE OF RESIDENTIAL POWER INSTALLATIONS

The most common reason for a generator set failing to start during a power outage is lack of maintenance. A qualified distributor of residential generator sets will offer to their customers a preventive maintenance program that looks to prevent the issues that lead to generator set failure. A standby generator system sits stationary until the utility power fails. The following items have to be monitored while the unit is in the stationary mode and will be part of a distributor's preventive maintenance program.

- 1) Battery condition** - Manufacturers and distributors maintaining systems highly recommend an automatic battery charger to maintain the battery in a fully charged condition. A battery will lose its charge over time.
- 2) Exercise timer** - Most manufacturers incorporate into their automatic controls an exerciser timer that starts the set once a week to ensure all the controls are functioning properly.
- 3) Fuel condition** - Both the amount of available fuel and its condition should be regularly monitored.

For maximum reliability in power outages longer than 120 hours, or even as low as 30 hours, a home owner should select a 1,800 rpm, 4-pole residential power system fueled by LPG, natural gas or diesel. For full details of the best system to select for any residential application, you should consult a reputable distributor or dealer in your area. Careful selection and continued maintenance of your generator set will make it more likely the generator starts when needed and continue to run through an extended power outage.

To fulfill our commitment to be the leading supplier in the power generation industry, the Buckeye Power Sales team ensures they are always up-to-date with the current power industry standards as well as industry trends. As a service, our Information Sheets are circulated on a regular basis to existing and potential power customers to maintain their awareness of changes and developments in standards, codes and technology within the power industry.



CANAL WINCHESTER, OH
8155 Howe Industrial Parkway
Canal Winchester, OH 43110
(614) 751-4515
(866) 889-2628

CINCINNATI, OH
4992 Rialto Road
West Chester, OH 45069
(513) 755-2323
(800) 368-7422

CLEVELAND, OH
8465 Tower Drive
Twinsburg, OH 44087-0394
(330) 425-9165
(800) 966-2825

TOLEDO, OH
12400 Williams Road
Perrysburg, OH 43551
(855) 638-2728

CHICAGO, IL
1308 Marquette Drive
Romeoville, IL 60446
(630) 914-3000

INDIANAPOLIS, IN
1707 S. Franklin Road
Indianapolis, IN 46239
(317) 271-9661
(800) 632-0339

FORT WAYNE, IN
7525 Maplecrest Road #221
Fort Wayne, IN 46835
(855) 638-2721

