

### Automatic Transfer Switches Standard Specific Breaker Rated

**ISO 9001**  
**KOHLER**  
NATIONALLY REGISTERED



#### Available Controllers

- Decision-Maker® MPAC 1200

#### Ratings

Current	Voltage	Frequency
30- 1200 amps	208- 600 VAC	50/60 Hz


#### Transfer Switch Standard Features

- UL 1008 listed  
file # E58962 (automatic), # E86894 (nonautomatic)
- CSA certification available
- IBC seismic certification available
- Available in 2, 3, or 4 pole configurations
- Electrically operated, mechanically held mechanism
- High withstand and close-on ratings
- Design suitable for emergency and standby applications on all classes of load, 100% tungsten rated through 400 amps
- Silver alloy main contacts
- Gold-flashed engine start contacts  
rated 2 amps @ 30 VDC/250 VAC
- Front-accessible contacts for easy inspection
- Front-replaceable main and arcing contacts (800- 1200 amps)
- Reliable, field-proven solenoid mechanism
- Switching mechanisms lubricated for the expected life of the transfer switch
- Internal manual operating handle
- Main shaft auxiliary position-indicating contacts  
rated 10 amps @ 32 VDC/250 VAC
- NEMA type 1, 12, 3R, 4, and 4X enclosures available
- Standard one-year limited warranty. Extended limited warranties are available.
- Standard-transition operation with either automatic or non-automatic control
- Standard-transition transfer time less than 100 milliseconds (6 cycles @ 60 Hz)
- Double-throw, mechanically interlocked design (break-before-make power contacts)
- Solid, switched, or overlapping (make-before-break) neutral

# Automatic Transfer Switch Controller

# Codes and Standards

## Decision-Maker® MPAC 1200 Controller

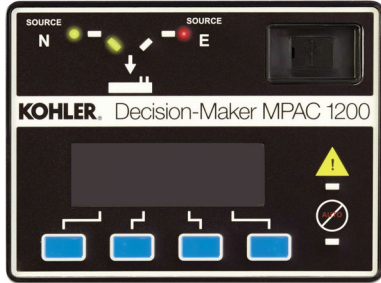

- LCD display, 4 lines x 20 characters, backlit
- Complete programming and viewing capability at the door using the keypad and LCD display
- LED indicators: Source available, transfer switch position, service required (fault), and “not in auto”
- Programmable voltage and frequency pickup and dropout settings
- Programmable time delays
- Programmable generator exerciser
- Time-based load control
- Two programmable inputs and two programmable outputs
- Up to four I/O extension modules available
- Modbus communication standard
- RS-485 communication standard
- Ethernet communication optional

For more information about Decision-Maker® MPAC 1200 features and functions, see specification sheet G11- 127.

The ATS meets or exceeds the requirements of the following specifications:

- CSA C22.2 No. 178 certification available, file #LR58301
- EN61000-4-4 Fast Transient Immunity Severity Level 4
- EN61000-4-5 Surge Immunity Class 4 (voltage sensing and programmable inputs only)
- IEC Specifications for EMI/EMC Immunity:
  - CISPR 11, Radiated Emissions
  - IEC 1000-4-2, Electrostatic Discharge
  - IEC 1000-4-3, Radiated Electromagnetic Fields
  - IEC 1000-4-4, Electrical Fast Transients (Bursts)
  - IEC 1000-4-5, Surge Voltage
  - IEC 1000-4-6, Conducted RF Disturbances
  - IEC 1000-4-8, Magnetic Fields
  - IEC 1000-4-11, Voltage Dips and Interruptions
- IEEE Standard 446, IEEE Recommended Practice for Emergency and Standby Power Systems for Commercial and Industrial Applications
- IEEE 472 (ANSI C37.90A) Ring Wave Test
- NEMA Standard ICS 10-2005, Electromechanical AC Transfer Switch Equipment
- NFPA 70, National Electrical Code
- NFPA 99, Essential Electrical Systems for Health Care Facilities
- NFPA 110, Emergency and Standby Power Systems
- Seismic certification in accordance with the International Building Code is available. (Accessory kit is required for seismic certification.)
  - IBC 2000, referencing ASCE 7-98 and ICC AC-156
  - IBC 2003, referencing ASCE 7-02 and ICC AC-156
  - IBC 2006, referencing ASCE 7-05 and ICC AC-156
  - IBC 2009, referencing ASCE 7-05 and ICC AC-156
  - IBC 2012, referencing ASCE 7-10 and ICC AC-156
- Underwriters Laboratories UL 1008, Standard for Automatic Transfer Switches for Use in Emergency Standby Systems file #E58962 (automatic), #E86894 (nonautomatic)

# Application Data

Environmental Specifications	
Operating Temperature	- 20°C to 70°C (- 4°F to 158°F)
Storage Temperature	- 40°C to 85°C (- 40°F to 185°F)
Humidity	5% to 95% noncondensing

Auxiliary Position Indicating Contacts (rated 10 amps @ 32 VDC/250 VAC)	
Switch Rating, Amps	Number of Contacts Indicating Normal, Emergency
30- 230	2, 2
260- 1200	8, 8

Input and Output Connection Specifications	
Component	Wire Size Range
Main board I/O terminals	#12- 24 AWG
I/O module terminals	#14- 24 AWG

## Cable Sizes

**Note:** Cable size data is subject to change. Refer to the transfer switch dimension drawings and wiring diagrams for planning and installation.

UL-Listed Solderless Screw-Type Terminals for External Power Connections				
Range of Wire Sizes, Copper or Aluminum *				
Model	Switch Rating, Amps	Normal, Emergency, and Load (per phase)	Neutral (3-pole)	Ground
KSS	30- 150	(1) #14 AWG to 4/0 AWG	(3) #14 to 4/0 AWG	(3) #6 to 3/0 AWG
	200	(1) #14 AWG to 4/0 AWG <i>Cu only</i>	(3) #14 to 4/0 AWG <i>Cu only</i>	(3) #6 to 3/0AWG
	230 (208- 480 V)			
	230 (600 V)	(1) #4 AWG to 600 KCMIL or (2) 1/0 AWG to 250 KCMIL	(3) #4 AWG to 600 KCMIL or (6) 1/0 AWG to 250 KCMIL	(3) #4 AWG to 600 KCMIL or (6) 1/0 AWG to 250 KCMIL
	260- 400			
	600	(2) #2 AWG to 600 KCMIL	(6) #2 AWG to 600 KCMIL	(3) #4 AWG to 600 KCMIL or (6) 1/0 to 250 KCMIL
	800- 1000	(4) 1/0 AWG to 750 KCMIL	(12) 1/0 AWG to 750 KCMIL	
	1200 (NEMA 3R)			
1200 (NEMA 1)	(4) 1/0 AWG to 750 KCMIL	(12) 1/0 AWG to 750 KCMIL	(3) #4 AWG to 500 KCMIL	

\* Use 75°C minimum Cu/Al wire for power connections.

## Weights and Dimensions

**Note:** Always use the transfer switch dimension drawing for planning and installation. Weights and dimensions may vary for different configurations. See your local distributor for dimension drawings.

Weights and dimensions are shown for NEMA Type 1 enclosures, NEMA Type 3R enclosures and open units. See the transfer switch dimension drawings for other enclosure types.

Model	Amps	NEMA Type	Poles	Wires	Dimensions mm (in.)			Weight kg (lb.)			Dimension Drawing
					Height	Width	Depth	2-Pole	3-Pole	4-Pole	
KSS	30- 200	1, 3R	2,3,4	3, 4	791 (31)	450 (18)	314 (12.4)‡	28 (62)	30 (65)	31 (68)	ADV-8566
	230 (208- 480V)		2,3,4	3, 4	1223 (48)	560 (22)	362 (14.3)‡	52 (115)	56 (123)	59 (131)	ADV-8568
	230 (600 V) 260- 600		2,3,4	3, 4	1702 (67)	610 (24)	514 (20.2)‡	179 (395)	183 (403)	188 (414)	ADV-8570
	800		2,3,4	3, 4	1932 (76)*	864 (34)	515 (20.3)‡	220 (485)	231 (510)	238 (525)	ADV-8572
	1000		3,4	4	1932 (76)*	864 (34)	515 (20.3)‡	—	231 (510)	238 (525)	ADV-8572
	1200		1	3,4	4	2286 (90)	963 (38)	688 (27.1)	—	356 (785)	379 (835)
		3R	3,4	4	2286 (90)	940 (37)	717 (28.2)	—	356 (785)	379 (835)	ADV-8575
	30- 200	Open Unit §	2,3,4	3, 4	787 (31)	445 (18)	296 (11.6)	8 (17)	9 (20)	11 (23)	ADV-7182
	230 (208- 480V)		2,3,4	3, 4	1219 (48)	457 (18)	330 (13.0)	17 (37)	21 (45)	24 (53)	
	230 (600V) 260- 600		2,3,4	3, 4	1422 (56)	610 (24)	362 (14.3)	31 (68)	34 (74)	36 (80)	
	800		2,3,4	3, 4	1829 (72)	864 (34)	508 (20)	68 (150)	78 (170)	90 (196)	
	1000		3,4	4	1829 (72)	864 (34)	508 (20)	—	78 (170)	90 (196)	
1200	3,4		4	2210 (87)	965 (38)	584 (23)	—	78 (170)	90 (196)		

\* Includes mounting feet

‡ On 30- 1000 amp models, the NEMA type 3R enclosures have a security cover on the controller that extends 54 mm (2.1 in.) beyond the door.

§ Dimensions shown for open units are the minimum required enclosure size. Open unit weights are shipping weights for the contactor only.

## Withstand and Close-On Ratings (WCR) Standard, Programmed, and Closed-Transition Models

Maximum current in RMS symmetrical amperes when coordinated with customer-supplied fuses or circuit breakers. All values are available symmetrical RMS amperes and tested in accordance with the withstand and close-on requirements of UL 1008. Application requirements may permit higher withstand ratings for certain size switches. Contact the factory for assistance.

Model	Switch Rating, Amps	Withstand Current Ratings in RMS Symmetrical Amperes									
		Current-Limiting Fuses				Time-Based Rating			Specific Breaker		
		480 V Max.	600 V Max.	Amps, Max.	Fuse Class	Time, sec.	480 V Max.	600 V Max.	240 V Max.	480 V Max.	600 V Max.
KSS	30	100kA	—	300	J	0.025	10kA	10kA	22kA	22kA	10kA
		200kA	35kA	200	J						
		35kA	35kA	200	RK1						
	70 104 150	200kA	35kA	200	J	0.025	10kA	10kA	150kA	85kA	25kA
		35kA	35kA	200	RK1						
	200	200kA	35kA	200	J	0.025	10kA	10kA	200kA	85kA	14kA
		35kA	35kA	200	RK1	0.025	10kA	10kA	200kA	85kA	14kA
	230 (480V)	100kA	—	300	J	0.025	10kA	—	200kA	85kA	14kA
	230 (600V) 260	200kA	200kA	600	J	0.05	22kA	22kA	200kA	200kA	42kA
				800	L						
	400 600	200kA	200kA	600	J	0.05	22kA	22kA	65kA	50kA	42kA
				800	L						
	800-1200	200kA	200kA	1600	L	0.05	22kA	22kA	65kA	65kA	65kA

### Ratings with Specific Manufacturers' Circuit Breakers

The following charts list power switching device withstand and close-on ratings (WCR) in RMS symmetrical amperes for specific manufacturers' circuit breakers. Circuit breakers are supplied by the customer.

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers			
				Manufacturer	Type or Class	Max. Size, amps	
KSS	30	22,000	480	GE	THED	40	
		25,000		Siemens/ITE	ITE CED6	125	
	70	150,000 125,000 100,000 65,000 42,000 25,000 25,000 22,000	240	Square D	HR		250
					HL		150
					BJ, HJ		125
					BG, HG		125
					QG, QJ		90
					HD		150
					BD		125
					GE	THED	90
		85,000 50,000 35,000 18,000 25,000 18,000 14,000	480	Square D	HL, HR		150
					BJ		125
					HG, HJ		150
					BG		125
					BD, HD		125
					HJ, HL, HR		150
					BJ		125
	600	Square D	HG		150		
			BG		125		
HD				150			
BD				125			

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers			
				Manufacturer	Type or Class	Max. Size, amps	
KSS	104	150,000	240	Square D	HR	250	
		125,000			HL	150	
		100,000			BJ, HJ	125	
		65,000			BG, HG	125	
		42,000			QG, QJ	125	
		25,000			HD	150	
		22,000	480	GE	THED	150	
		85,000			Square D	HL, HR	150
		50,000				BJ	125
		35,000				HG, HJ	150
						BG	125
		18,000				BD, HD	125
		600	Square D	25,000		HJ, HL, HR	150
				18,000	BJ	125	
					HG	150	
					BG	125	
HD	150						
14,000	BD	125					
KSS	150	150,000	240	Square D	HR	250	
		125,000			HL	150	
		100,000			BJ, HJ	125	
		65,000			JG, JJ, JL, JR	200	
		42,000			BG, HG	125	
		25,000			QG, QJ	200	
		22,000	480	GE	THED	150	
		85,000			Square D	HL, HR	150
		50,000				BJ	125
		35,000				HG, HJ	150
						BG	125
		25,000				JG, JJ, JL	200
		18,000	BD, HD	125			
		600	Square D	25,000	HJ, HL, HR	150	
				18,000	BJ	125	
					HG	150	
BG	125						
HD	150						
14,000	BD	125					

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers			
				Manufacturer	Type or Class	Max. Size, amps	
KSS	200 230	200,000	240	Square D	JR	250	
		125,000			JL	250	
		100,000			JJ	250	
		65,000			JG	250	
		42,000			QG, QJ	225	
		25,000			JD	250	
		85,000			Square D	JL, JR	250
		30,000				JG, JJ	250
	18,000	JD	250				
	200	14,000	600	Square D	JD, JG, JJ, JL, JR	250	
	230	42,000	600	Eaton/ Cutler Hammer	JGU, JGX, JGH	250	
					KDC	400	
					LDC, CLDC	600	
				GE	TBC4	400	
					SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGP	600	
				Siemens /ITE	HJD, CFD6	250	
					HHJD6, HHJXD6, CJD6, SCJD6	400	
				Square D	HHLD6, HHLXD6, CLD6, SCLD6, LNG, LPG, LGC*, LGU*, LGX*	600	
					HJ, HL, HG	150	
					KI, JJ, JL, JR, CF250L	250	
					CK400H, CK400HH, CJ400L	400	
					CK800H, CK800HH, MasterPact STR 28D, PK	800	
	LL (current limiting)	600					
LR (current limiting)	600						
Eaton/ Cutler Hammer	PD3 (current limiting)	600					
* With Digitrip 310+ LS or LSG Inst. Override set to 12X.							
§ KCP only							

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers		
				Manufacturer	Type or Class	Max. Size, amps
KSS	260	65,000	240	GE	THQMV	225
					SGL1, SGL4, SGL6, SGP1, SGP4, SGP6	600
				Eaton/Cutler Hammer	LDC, CLDC, HLD, CHLD	600
				Siemens/ITE	HLD6, HLXD6	600
				Square D	QG, QJ	250
					LJ (current limiting)	600
		LL (current limiting)	600			
		LR (current limiting)	600			
		200,000	Eaton/Cutler Hammer	PD2 (current limiting)	225	
			PD3 (current limiting)	600		
		50,000	480	Eaton/Cutler Hammer	HFDE, FDCE, HFD, FDC, LHH	225
					JDC, JGH, JGC, JGU, JGX	250
					HKD, HKDB, CHKD, CHKDB, KDC	400
					HLD, CHLD, LDC, CLDC, LGH*, LGC*, LGU*, LGX*, NHH	600
					MDL, CMDL, HMDL, CHMDL, NGS, NGH, NGC, MDLB, CMDLB, HMDLB, CHMDLB	800
					GE	SFL, SFP, FEN, FEH
				TBC4	400	
				TBC6, TJK4V, TJK1S-6S, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGN, FGH, FGL, FGP	600	
				TBC8, TKL4V, TKH8S-12S, TKL8S-12S, SKH8, SKL8, SKP8, TB8	800	
			Siemens/ITE	HFD6, HFXD6, HHFD6, HHFXD6, CFD6, HFG, LFG	250	
				HJD6, HJXD6, SHJD6, HHJD6, HHJXD6, CJD6, SCJD6, HJG, LJG, LLG	400	
				HLD6, HLXD6, SHLD6, HHL6, HHLXD6, CLD6, SCLD6, HLG	600	
				LMD, LMD6, LMXD, LMXD6, HLMD, HLMD6, HLMXD, HLMXD6, MD, MD6, MXD6, HMG, HMD6, HMXD6, SMD6, SHMD6, CMD6, SCMD6, LMG, MG	800	
				KI, KC, CF250L, NSF250	250	
				CK400N, CK400NN, CK400H, CK400HH, CJ400L, NSJ400	400	
			Square D	LC, DJ, DL, LJ, LL, LR, LI, NSJ600	600	
				CK800N, CK800NN, CK800H, CK800HH, MasterPact STR 28D, MJ, PK, PJ, PL	800	
				CK1000HL	1000	
				CK1200NN, CK1200HH	1200	
				JJ (current limiting)	250	
				LJ (current limiting)	600	
				JL (current limiting)	250	
				LL (current limiting)	600	
				JR (current limiting)	250	
		LR (current limiting)		600		
		Eaton/Cutler Hammer		PD2 (current limiting)	225	
		PD3 (current limiting)		600		
		42,000	600	Eaton/Cutler Hammer	JGU, JGX	250
					KDC	400
					LDC, CLDC	600
				GE	TBC4	400
					TBC6, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGP	600
TBC8, TKL4V, TKL8S-12S, SKL8, SKP8	800					
Siemens/ITE	HJD, CFD6		250			
	HHJD6, HHJXD6, CJD6, SCJD6		400			
	HHL6, HHLXD6, CLD6, SCLD6		600			
	HLM6, HLMXD6, HMXD6, SHMD6, HMD6, CMD6, SCMD6, LMG, LNG, LPG, LGC*, LGU*, LGX*		800			
	Square D		KI, JL, JR, JJ, CF250L	250		
			CK400H, CK400HH, CJ400L	400		
LI			600			
	CK800H, CK800HH, MasterPact STR 28D, PK		800			
	LL (current limiting)		600			
50,000	Eaton/Cutler Hammer		PD3 (current limiting)	600		
65,000	Square D		LR (current limiting)	600		
100,000	Square D		LR (current limiting)	600		

\* With Digitrip 310+ LS or LSG Inst. Override set to 12X.

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers					
				Manufacturer	Type or Class	Max. Size, amps			
KSS	400	65,000	240	GE	THQMV	225			
					SGL1, SGL4, SGL6, SGP1, SGP4, SGP6	600			
				Eaton/Cutler Hammer	LDC, CLDC, HLD, CHLD	600			
					PD2 (current limiting)	225			
				PD3 (current limiting)	600				
				Siemens/ITE	HLD6, HLXD6	600			
		100,000	240	Square D	QG, QJ	250			
					LJ (current limiting)	600			
					LL (current limiting)	600			
					LR (current limiting)	600			
					50,000	480	Eaton/Cutler Hammer	JGH, JGC, NHH	250
								HKD, CHKD, KDC, HKDB, CHKDB, LHH	400
		CHLD, LDC, CLDC, LGH*, LGC*, LGU*, LGX*	600						
		MDL, CMDL, HMDL, CHMDL, NGS, NGH, NGC, MDLB, CMDLB, HMDLB, CHMDLB	800						
		NGU	1600						
		GE	TBC4	400					
			TBC6, TJL4V, TJL1S- 6S, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGN, FGH, FGL, FGP	600					
		100,000	480	Siemens/ITE	TBC8, TKL4V, TKH8S- 12S, TKL8S- 12S, SKH8, SKL8, SKP8, TB8	800			
					HFD6, HFXD6, HFG, LFG	250			
					HJD6, HJXD6, SHJD6, HHJD6, HHJXD6, CJD6, SCJD6, HJG, LLG, LJG	400			
					HLD6, HLXD6, SHLD6, HHLD6, HHLXD6, CLD6, SCLD6, HLG	600			
					LMD6, LMXD6, HLMD6, HLMXD6, MD6, MXD6, HMD6, HMXD6, SMD6, SHMD6, CMD6, SCMD6, HMG, LMG	800			
					Square D	CK400N, CK400NN, CK400H, CK400HH, CJ400L, NSJ400	400		
		LC, DJ, DL, LJ, LL, LR, LI, NSJ600	600						
		CK800N, CK800NN, CK800H, CK800HH, MJ	800						
		CK1000HH	1000						
		PK, PJ, PL, MH, MasterPact STR 28D, CK1200HH	1200						
		LJ (current limiting)	600						
		100,000	480	Eaton/Cutler Hammer	LL (current limiting)	600			
					LR (current limiting)	600			
					PD3 (current limiting)	600			
		42,000	600	Eaton/Cutler Hammer	KDC	400			
					LDC, CLDC, LGC*, LGU*, LGX*	600			
PD3 (current limiting)	600								
GE	TBC4			400					
	TBC6, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGP			600					
	TBC8, TKL4V, TKL8S- 12S, SKL8, SKP8			800					
Siemens/ITE	HHJD6, HHJXD6, CJD6, SCJD6	400							
	HHLD6, HHLXD6, CLD6, SCLD6	600							
	HLMD6, HLMXD6, HMXD6, SHMD6, HMD6, CMD6, SCMD6, LMG	800							
50,000	600	Square D	LNG, LPG	1200					
			CK400H, CK400HH, CJ400L	400					
			LI	600					
			CK800H, CK800HH	800					
			MasterPact STR 28D, PK	1200					
			LL (current limiting)	600					
100,000	600	Square D	LR (current limiting)	600					

\* With Digitrip 310+ LS or LSG Inst. Override set to 12X.



Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers				
				Manufacturer	Type or Class	Max. Size, amps		
KSS	600	65,000	240	GE	THQMV	225		
					SGL1, SGL4, SGL6, SGP1, SGP4, SGP6	600		
				Siemens / ITE	HLD6, HLXD6	600		
				Eaton/ Cutler Hammer	LDC, CLDC, HLD, CHLD	600		
			100,000	Square D		QG, QJ	250	
					LJ (current limiting)	600		
					LL (current limiting)	600		
					LR (current limiting)	600		
			125,000	Eaton/ Cutler Hammer		PD2 (current limiting)	225	
					PD3 (current limiting)	600		
			200,000	Eaton/ Cutler Hammer		JGH, JGC, HFG, LFG	250	
						HLD, CHLD, LDC, CLDC, LGH*, LGC*, LGU*, LGX*	600	
			50,000	Eaton/ Cutler Hammer		MDL, CMDL, HMDL, CHMDL, NGS, NGH, NGC, NGU, MDLB, CMDLB, NF	800	
					GE		TBC6, TJL4V, TJL1S- 6S, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGN, FGH, FGL, FGP	600
							TBC8, TKL4V, TKH8S- 12S, TKL8S- 12S, SKH8, SKL8, SKP8, TB8	800
				SKL12, SK12P		1200		
			50,000	480	Siemens / ITE		HLD6, HLXD6, SHLD6, HHLXD6, HHLXD6, CLD6, SCLD6, HLG, LLG	600
							LMD6, LMXD6, HLMXD6, HLMXD6, MD6, MXD6, HMD6, HMXD6, SMD6, SHMD6, CMD6, SCMD6, HMG, LMG	800
							HND6, HNXD6, SND6, SHND6, ND6, NXD6, HNG, LNG, CND6	1200
					Square D		LC, DJ, DL, LI, NSJ600	600
							CK800N, CK800NN, MJ	800
							MH, CK1200N, CK1200NN, CK1200H, CK1200HH, NT- H, NT- L1, NT- L, NT- LF, PK, PJ, PL	1200
							CM2000HH	2000
							CM2500HH	2500
							PL1200	1200
							LJ (current limiting)	600
				LL (current limiting)	600			
				LR (current limiting)	600			
			85,000	Eaton/ Cutler Hammer		PD3 (current limiting)	600	
			42,000	Eaton/ Cutler Hammer		JGC	250	
						TBC4	400	
						LDC, CLDC	600	
			42,000	600	GE		TBC6, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGP	600
							TBC8, TKL4V, TKL8S- 12S, SKL8, SKP8	800
							SKL12, SKP12	1200
				Siemens / ITE		HHLXD6, HHLXD6, CLD6, SCLD6	600	
						HLMXD6, HLMXD6, HMXD6, SHMD6, HMD6, CMD6, SCMD6, LMG	800	
						HND6, HNXD6, HNG, LNG, SHND6	1200	
				Square D		LI	600	
						CK800H, CK800HH	800	
		CK1000HL			1000			
		CK1200H, CK1200HH, NT- H, NT- L, NT- LF, NT- L1, MasterPact STR 28D, PK			1200			
	50,000			LL (current limiting)	600			
	65,000	Eaton/ Cutler Hammer		PD3 (current limiting)	600			
	100,000	Square D		LR (current limiting)	600			

\* With Digitrip 310+ LS or LSG Inst. Override set to 12X.

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers		
				Manufacturer	Type or Class	Max. Size, amps
KSS	800 1000 1200	65,000	480	Eaton/ Cutler Hammer	HLD, CHLD, LGH, LGC, LGU, LGX, LDC, CLDC	600
					HMDL, CHMDL, HMDLB, CHMDLB	800
					HND, CHND, NDC, CNDC, NF	1200
					NGH, NGC, NGU	1600
					RGH, RGC	2500
				GE	TBC6, TJL4V, SGL, SGP6	600
					TBC8, SKL8, SKP8	800
					SKL12, SKP12, TKL4V	1200
				Siemens /ITE	HLXD6, HHLXD6, HHLD6, CLD6, SHLD6, SCLD6, HLG, LLG	600
					HMXD6, HMD6, SHMD6, HMG, LMG, CMD6, SCMD6	800
					SHND6, CND6, HNXD6, HNG, LNG	1200
					HPG, LPG, HPD, HPD6, CPD6, HPXD, HPXD6, SHPD, SHPD6	1600
	Square D	HRD6, HRXD6	2000			
		LI, LE LSI, LE LI, LX, LXI, LJ, LL, LR	600			
		MJ, ME, MX, CK800H, CK800HH	800			
		CK1000HL	1000			
		NT-L1, NT-L, NT-LF, NE, NX, CK1200H, CK1200HH, PJ, PL	1200			
		NW, RJ, RL, MTZ	1600			
		PE, PX	2500			
		SES, SE, SEH (LS or LSI TRIP)	3000			
		SE (LI, LSI-E, and LI-E TRIP)	4000			
	MasterPact STR 28D	6300				
	65,000	600	600	Eaton/ Cutler Hammer	Tri-Pac NB	800
					RDC	2500
Siemens /ITE					CND	1200

## Controller Accessories

See the controller specification sheets for more information.

### Accessory Modules

- Alarm Module
- External Battery Supply Module
- Input/Output Module
- High-Power Input/Output Module

### Controller Disconnect Switch

### Ethernet Communications

### Current Sensing Kit

### Padlockable User Interface Cover

### Supervised Transfer Control Switch

## Transfer Switch Accessories

Accessories are available either factory-installed or as loose kits, unless otherwise noted.

### CSA Certification

### Digital Meter

- Measure and display voltage, current, frequency, and power
- 35 programmable alarms
- LCD display, 67 x 62.5 mm (2.65 x 2.5 in.)
- Pushbutton operation
- Password-protected programming menus
- Two digital inputs
- Two digital outputs
- Two Form A relay outputs
- Serial port for optional network connections
- Data logging
- Factory-installed

### Engine Start Circuit Monitor

See Specification Sheet G6- 165.

### Export Packaging

- 10-year major components

### Extended Limited Warranties

- 2-year basic
- 5-year basic
- 5-year comprehensive

### Heater, Anti-Condensation

- Hygrostat-controlled 120 VAC strip heater (customer-supplied voltage source required)
- 100 or 250 watts (sized for enclosure)
- Protective 15 Amp circuit breaker

### Literature Kits

- Production literature kit (one set of literature is included with each transfer switch)
- Overhaul literature kit

### RSA III Remote Serial Annunciator

- Monitors the generator set
- Monitors Normal and Emergency source status and connection
- Monitors ATS common alarm
- Allows remote testing of the ATS
- For more information, see specification sheet G6- 139.

### Surge Protection Device (SPD)

- SPD available for the normal source supply
- Surge protection reduces transient voltages to harmless levels
- Protection modes: L-L / L-N / L-G / N-G
- Replaceable phase and neutral cartridges for service
- Frequency: 50- 60 Hz
- Operating Temperature Range: - 40 to 176°F (- 40 to 80°C)
- Remote contacts for customer-supplied status indicators:  
 Contacts: 1 NO, 1 NC  
 Min Load: 12VDC / 10 mA  
 Max. Load: 250 VAC / 1 A  
 Wire Size (max.): 16AWG
- Fuse protection: 30 amps / 600 V
- UL 1449, 3rd Edition for Type 2 applications
- IEC 61-643-1, 2nd Edition T2/11
- See additional SPD specifications below

## Seismic Certification


### IBC Seismic Certification

- Certification depends on application and geographic location. Contact your distributor for details.
- Available for all KSS enclosures.

SPD Specifications

Nominal Voltage (V ±15%)	Max. Discharge Current (kA)	Phase	Poles	UL VPR 3rd Ed (L-N/N-G/L-G) (kV)	Limiting Voltage, (L-N/N-G/L-G) (kV)		Short Circuit Withstand Current (kA)	Maximum Continuous Operating Voltage (VAC)
					at 3kAmps	at 10kAmp		
240/120	40	Split	3	0.6 / 1.2 / 0.7	0.6 / 0.4 / 0.6	0.8 / 0.7 / 0.8	200	175 / 350
208/120	40	Wye	4	0.6 / 1.2 / 0.7	0.6 / 0.4 / 0.6	0.8 / 0.7 / 0.8	200	175 / 350
480/277	40	Wye	4	1.0 / 1.2 / 1.1	1.0 / 0.4 / 1.0	1.2 / 0.7 / 1.2	200	320 / 640
240/120	40	HLD	4	1.0 / 1.2 / 1.1	1.0 / 0.4 / 1.0	1.2 / 0.7 / 1.2	200	320 / 640
600/347	40	Wye	4	1.3 / 1.2 / 1.4	1.3 / 0.4 / 1.3	1.5 / 0.7 / 1.5	200	440 / 880

## Model Designation

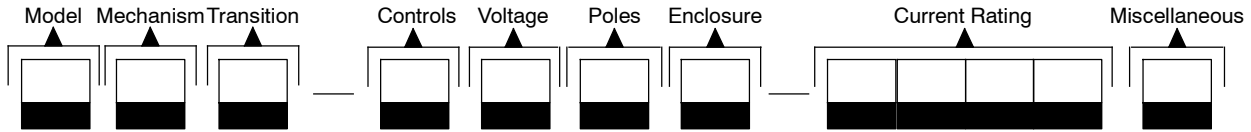

Record the transfer switch model designation in the boxes. The transfer switch model designation defines characteristics and ratings as explained below.

### Sample Model Designation: KSS-AMTA-0400S

#### Model

K: Kohler

#### Mechanism

S: Standard (Specific Breaker)

#### Transition

S: Standard

#### Controller

A: Decision-Maker® MPAC 1200, Automatic  
 B: Decision-Maker® MPAC 1200, Non-Automatic

#### Voltage/Frequency

C: 208 Volts/60 Hz	K: 440 Volts/60 Hz
D: 220 Volts/50 Hz	M: 480 Volts/60 Hz
F: 240 Volts/60 Hz	N: 600 Volts/60 Hz
G: 380 Volts/50 Hz	P: 380 Volts/60 Hz
H: 400 Volts/50 Hz	R: 220 Volts/60 Hz
J: 416 Volts/50 Hz	S: 400 Volts/60 Hz

#### Number of Poles/Wires

N: 2 Poles/3 Wires, Solid Neutral  
 T: 3 Poles/4 Wires, Solid Neutral  
 V: 4 Poles/4 Wires, Switched Neutral  
 W: 4 Poles/4 Wires, Overlapping Neutral

#### Enclosure

A: NEMA 1	D: NEMA 4
B: NEMA 12	F: NEMA 4X
C: NEMA 3R	G: Open Unit

#### Current, Amps

0030	0200	0600
0070	0230	0800
0104	0260	1000
0150	0400	1200

#### Connections

S: Standard

**Note:** Some selections are not available for every model. Contact your Kohler distributor for availability.

**DISTRIBUTED BY:**

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® Power Systems distributor for availability.