


Several areas of the U.S. are designated as areas of higher seismic activity. (See diagram 2) For such areas, system designers must consider the International Building Code standards for key buildings applicable to those areas. A system designer must consider the behavior of non-structural elements during seismic activity/earth quakes. This data sheet discusses methods to make a generator installation compliant with codes for Seismic activity areas.



The installation information provided in this information sheet is information sheet is information ali in nature only, and should not be considered the advice of a properly licensed and qualified electrician or used in place of a detailed review of the applicable National Electric Codes and local codes. Specific questions about how this information may affect any particular situation should be addressed to a licensed and qualified electrician.

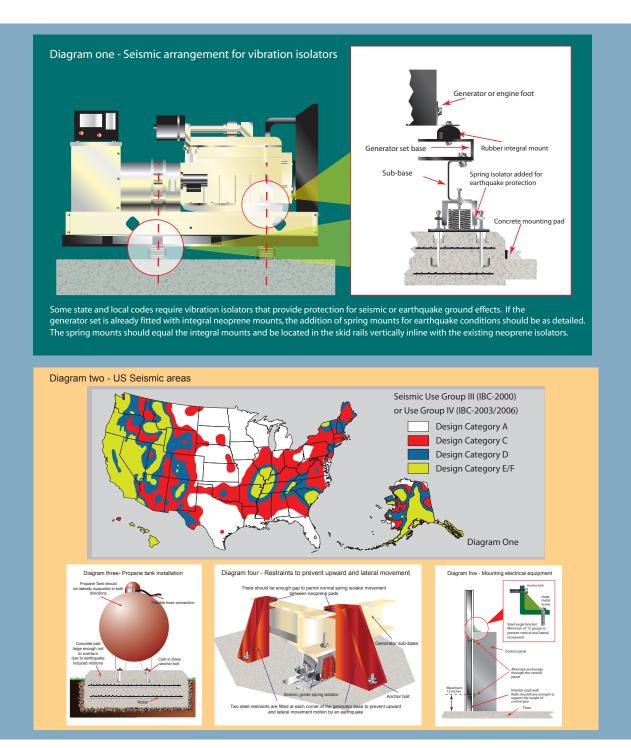

### **1.0 CODE DEVELOPMENT:**

Prior to the latest IBC publication, building codes for seismic prone areas focused on a structure's ability to withstand seismic loads and the anchorage of internal equipment. New IBC codes now consider critical equipment to be part of a structure and require certification of an equipment's ability to perform after experiencing seismic shocks.

Applicable Code: International Building Code (IBC) 2000, 2003 & 2006 is an ICC publication funded by FEMA. International Code Council (ICC): ICC was formed to draft one set of national construction codes and encompasses:

- 1) Building Officials and Code Administrators (BOCA)
- 2) International Conference of Building Officials (ICBO)
- 3) Southern Building Code Congress International (SBCCI)

**Definition of seismic:** Seismic is the term given to forces resulting from the motions of an earthquake. Seismic forces affecting structures primarily move horizontally, but there may be significant vertical ones too.

#### 2.0 ENFORCEMENT OF IBC:

The IBC code is not a government mandate. However, all states are expected to adopt the codes and FEMA will withhold emergency funding for states that fail to comply. All 50 states and Washington D.C. had adopted the code at state or local levels as of 4/10/2008.

Specifics of the IBC code: If a building is still standing after the seismic shocks triggered by an earthquake, systems or components within that building labeled EMERGENCY, such as an emergency generator system, must continue to function. The IBC specifies detailed responsibilities that equipment manufacturers, suppliers, installers, design team managers and engineers are required to follow to design and install a life safety component that must remain On-line and Functional after a seismic emergency (Refer to seismic use groups III (IBC-2000) and IV (IBC-2003/2006) building for buildings and other structures designated as essential facilities such as hospitals, fire/rescue/police stations, shelters, etc)

Certification - Manufacturers providing equipment termed "EMERGENCY" (Ip =1.5), must have their equipment certified by testing, independent analysis or a combination of both to verify essential functions will perform after a seismic event.

Emergency generation systems for certification - Generators, sub-base tanks, day tanks, pumps, piping, mufflers, exhaust system, radiators, enclosures and electrical components are tested for IBC certification. (See diagrams 1, 3, 4 & 5)

**Buildings and Structures Designated as Essential Facilities:** The following chart details sample building and structures seismic use group III (IBC-2000) and use group IV (IBC-2003/2006) building codes, designate as essential facilities:

#### 3.0 SPECIFICS OF THE IBC CODE:

If a building is still standing after the seismic shocks triggered by an earthquake, systems or components within that building labeled EMERGENCY, such as an emergency generator system, must continue to function. The IBC specifies detailed responsibilities that equipment manufacturers, suppliers, installers, design team managers and engineers are required to follow to design and install a life safety component that must remain On-line and Functional after a seismic emergency (Refer to seismic use groups III (IBC-2000) and IV (IBC-2003/2006) building for buildings and other structures designated as essential facilities such as hospitals, fire/rescue/police stations, shelters, etc)

Certification - Manufacturers providing equipment termed "EMERGENCY" (Ip = 1.5), must have their equipment certified by testing, independent analysis or a combination of both to verify essential functions will perform after a seismic event.

Emergency generation systems for certification - Generators, sub-base tanks, day tanks, pumps, piping, mufflers, exhaust system, radiators, enclosures and electrical components are tested for IBC certification. (See diagrams 1, 3, 4 & 5)

Buildings and Structures Designated as Essential Facilities: The following chart details sample building and structures seismic use group III (IBC-2000) and use group IV (IBC-2003/2006) building codes, designate as essential facilities:

Hospital and other healthcare facilities with surgery and emergency treatment	Power stations and other public utility facilities required for category III/IV structures
Fire, rescue and police stations and emergency vehicle garages	Structures containing max. allowable highly toxic materials per section 307 table 307.7 (2)
Designated earthquake, hurricane or other emergency shelters	Buildings and other structures having critical national defense functions
911, communication, data, switching, operation centers	Water treatment facilities required to maintain water pressure for fire suppression

## 4.0 WHEN IS SEISMIC CERTIFICATION REQUIRED?:

The following three parameters dictate when certification is required:

- 1. An SDS of 0.167 or greater
- 2. Building classification or seismic use group III, (IBC200) of IV, (IBC-2003/2006) (See sample chart above)
- 3. Seismic design category of C, D, E, or F (See diagram 2).

### **5.0 DEFINING THE SEISMIC LEVEL REQUIRED:**

To determine the specific seismic level for any given installation, the specifying engineer must provide the seismic local code requirement, installation zip code, facility occupancy, the short and normal mapped spectral accelerations, site soil class, below or above grade, and, if installed inside, height of building and height location of equipment. (See diagram 2).

# 6.0 REQUIREMENTS TO ATTAIN GUIDELINE DETAILED IN IBC:

The generator manufacturer must use an approved, established agency that is recognized as regularly engaged in conducting tests or furnishing inspection services. An approved agency will issue certificate of compliance stating that materials and products meet specified standards or that work was done in compliance and with approved construction documents. (See Diagrams 3, 4 & 5).

To fulfill our commitment to be the leading supplier in the power generation industry, the Buckeye Power Sales team ensures they are always up-to-date with the current power industry standards as well as industry trends. As a service, our Information Sheets are circulated on a regular basis to existing and potential power customers to maintain their awareness of changes and developments in standards, codes and technology within the power industry.





CANAL WINCHESTER, OH 8155 Howe Industrial Parkway Canal Winchester, OH 43110 (614) 751-4515 (866) 889-2628

CHICAGO, IL 1308 Marquette Drive Romeoville, IL 60446 (630) 914-3000 CINCINNATI, OH 4992 Rialto Road West Chester, OH 45069 (513) 755-2323 (800) 368-7422

INDIANAPOLIS, IN 1707 S. Franklin Road Indianapolis, IN 46239 (317) 271-9661 (800) 632-0339 CLEVELAND, OH 8465 Tower Drive Twinsburg, OH 44087-0394 (330) 425-9165 (800) 966-2825

FORT WAYNE, IN 7525 Maplecrest Road #221 Fort Wayne, IN 46835 (855) 638-2721 TOLEDO, OH 12400 Williams Road Perrysburg, OH 43551 (855) 638-2728