




**Tier 2 EPA-Certified for Stationary Emergency Applications**

**Ratings Range**

		60 Hz	50 Hz
<b>Standby:</b>	<b>kW</b>	1480-1760	1348-1616
	<b>kVA</b>	1850-2200	1685-2020
<b>Prime:</b>	<b>kW</b>	1350-1600	1200-1464
	<b>kVA</b>	1688-2000	1500-1830

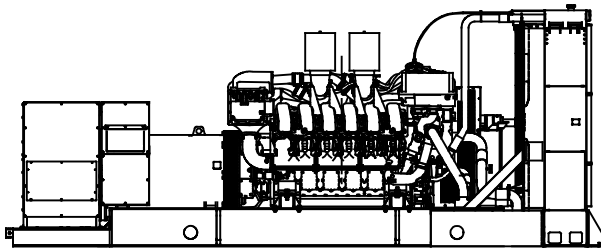

**Standard Features**

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- The generator set accepts rated load in one step.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- A standard one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are also available.
- Alternator features:
  - The pilot-excited, permanent magnet (PM) alternator provides superior short-circuit capability.
  - The brushless, rotating-field alternator has broadrange reconnectability.
  - Additional alternator voltages are available including 12.47 kV, 13.2 kV, and 13.8 kV medium voltages. Contact your local distributor for more detailed information.
- Other features:
  - Kohler designed controllers for guaranteed system integration and remote communication. See Controllers on page 3.
  - The low coolant level shutdown prevents overheating (standard on radiator models only).
  - Multiple circuit breaker configurations.

**Generator Set Ratings**

Alternator	Voltage	Ph	Hz	150°C Rise Standby Rating		130°C Rise Standby Rating		125°C Rise Prime Rating		105°C Rise Prime Rating	
				kW/kVA	Amps	kW/kVA	Amps	kW/kVA	Amps	kW/kVA	Amps
7M4052	220/380	3	60	1480/1850	2811	1480/1850	2811	1350/1688	2564	1350/1688	2564
	240/416	3	60	1620/2025	2810	1610/2013	2793	1470/1838	2550	1460/1825	2533
	277/480	3	60	1750/2188	2631	1750/2188	2631	1600/2000	2406	1600/2000	2406
	220/380	3	50	1480/1850	2811	1420/1775	2697	1420/1775	2697	1320/1650	2507
	230/400	3	50	1448/1810	2613	1348/1685	2432	1348/1685	2432	1240/1550	2237
7M4054	240/416	3	50	1380/1725	2394	1600/2000	2221	1280/1600	2221	1200/1500	2082
	220/380	3	60	1590/1988	3020	1590/1988	3020	1450/1813	2754	1450/1813	2754
	240/416	3	60	1760/2200	3053	1760/2200	3053	1600/2000	2776	1600/2000	2776
	277/480	3	60	1760/2200	2646	1760/2200	2646	1600/2000	2406	1600/2000	2406
	220/380	3	50	1588/1985	3016	1528/1910	2902	1456/1820	2765	1400/1750	2659
7M4056	230/400	3	50	1600/2000	2887	1540/1925	2778	1456/1820	2627	1428/1785	2576
	240/416	3	50	1600/2000	2776	1500/1875	2602	1456/1820	2526	1380/1725	2394
	220/380	3	60	1760/2200	3343	1760/2200	3343	1600/2000	3039	1600/2000	3039
7M4058	240/416	3	60	1760/2200	3053	1760/2200	3053	1600/2000	2776	1600/2000	2776
	277/480	3	60	1760/2200	2646	1760/2200	2646	1600/2000	2406	1600/2000	2406
	220/380	3	50	1616/2020	3069	1616/2020	3069	1464/1830	2780	1464/1830	2780
7M4176	230/400	3	50	1616/2020	2916	1616/2020	2916	1464/1830	2641	1464/1830	2641
	240/416	3	50	1616/2020	2803	1616/2020	2803	1464/1830	2540	1464/1830	2540
	220/380	3	60	1760/2200	3343	1760/2200	3343	1600/2000	3039	1600/2000	3039
7M4292	347/600	3	60	1760/2200	2117	1760/2200	2117	1600/2000	1925	1600/2000	1925
	2400/4160	3	60	1760/2200	305	1760/2200	305	1600/2000	278	1600/2000	278
7M4370	1905/3300	3	50	1600/2000	350	1520/1900	332	1452/1815	318	1400/1750	306
	2400/4160	3	60	1760/2200	305	1760/2200	305	1600/2000	278	1600/2000	278
7M4374	1905/3300	3	50	1600/2000	350	1600/2000	350	1456/1820	318	1448/1810	317

RATINGS: All three-phase units are rated at 0.8 power factor. *Standby Ratings:* The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. *Prime Power Ratings:* At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. For limited running time and continuous ratings, consult the factory. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

# Alternator Specifications

Specifications	Alternator
Type	4-Pole, Rotating-Field
Exciter type	Brushless, Permanent-Magnet
Voltage regulator	Solid State, Volts/Hz
Insulation:	NEMA MG1
Material	Class H, Synthetic, Nonhygroscopic
Temperature rise	130°C, 150°C Standby
Bearing: quantity, type	1, Sealed
Coupling	Flexible Disc
Amortisseur windings	Full
Rotor balancing	125%
Voltage regulation, no-load to full-load (with <0.5% drift due to temp. variation)	3-phase sensing, ±0.25%
One-step load acceptance at 60 Hz	100% of Rating
Unbalanced load capability	100% of Rated Standby Current
Peak motor starting kVA:	(35% dip for voltages below)
480 V, 416 V 7M4052 (4 bus bar)	5500 (60 Hz) 4650 (50 Hz)
480 V, 416 V 7M4054 (4 bus bar)	7000 (60 Hz) 6500 (50 Hz)
480 V 7M4056 (4 bus bar)	7200 (60 Hz) — (50 Hz)
480 V, 416 V 7M4058 (4 bus bar)	11000 (60 Hz) 8400 (50 Hz)
380 V 7M4176 (4 bus bar)	5400 (60 Hz) — (50 Hz)
600 V 7M4292 (4 bus bar)	4250 (60 Hz) — (50 Hz)
4160 V, 3300 V 7M4370 (6 lead)	5500 (60 Hz) 3000 (50 Hz)
4160 V, 3300 V 7M4374 (6 lead)	6200 (60 Hz) 3750 (50 Hz)

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and dripproof construction.
- Superior voltage waveform from two-thirds pitch windings and skewed stator.
- Digital solid-state, volts-per-hertz voltage regulator with ±0.25% no-load to full-load regulation.
- Brushless alternator with brushless pilot exciter for excellent load response.

## Application Data

### Engine

Engine Specifications	60 Hz	50 Hz
Manufacturer	Detroit Diesel/MTU	
Engine: model	12V4000G83	12V4000G63
Engine type	4-Cycle, Turbocharged, Intercooled	
Cylinder arrangement	12V	12V
Displacement, L (cu. in.)	57.2 (3491)	
Bore and stroke, mm (in.)	170 x 210 (6.7 x 8.3)	
Compression ratio	16.5:1	
Piston speed, m/min. (ft./min.)	756 (2480)	
Rated rpm	1800	1500
Max. power at rated rpm, kWm (BHP)	1910 (2561)	1750 (2346)
Cylinder head material	Cast Iron	
Crankshaft material	Forged Steel	
Valve (exhaust) material	High Alloy Steel	
Governor: type, make/model	ADEC Electronic Control	
Frequency regulation, no-load to full-load	Isochronous	
Frequency regulation, steady state	±0.25%	
Frequency	Fixed	
Air cleaner type, all models	Dry	

### Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust manifold type	Dry	
Exhaust flow at rated kW, m <sup>3</sup> /min. (cfm)	366 (12925)	306 (10806)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	465 (869)	470 (878)
Maximum allowable back pressure, kPa (in. Hg)	8.5 (2.5)	
Exhaust outlet size at engine hookup, mm (in.)	2 @ 254 (10)	

### Engine Electrical

Engine Electrical System	60 Hz	50 Hz
Battery charging alternator:		
Ground (negative/positive)		Negative
Volts (DC)		24
Ampere rating		70
Starter motor rated voltage (DC)		Dual, 24
Battery, recommended cold cranking amps (CCA):		
Quantity, CCA rating each		Four, 1150
Battery voltage (DC)		12

### Fuel

Fuel System	60 Hz	50 Hz
Fuel supply line, min. ID, mm (in.)	20 (0.79)	
Fuel return line, min. ID, mm (in.)	20 (0.79)	
Max. fuel flow, Lph (gph)	720 (190)	
Min./max. fuel pressure at engine supply connection, kPa (in. Hg)	-10/50 (-3/14.8)	
Max. return line restriction, kPa (in. Hg)	50 (14.7)	
Fuel filter	One, Secondary	
Recommended fuel	#2 Diesel	

### Lubrication

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity, dipstick mark max., L (qt.)	200 (211)	
Engine oil capacity, initial filling, L (qt.)	260 (275)	
Oil filter: quantity, type	4, Spin-On	
Oil cooler	Water-Cooled	

# Application Data

## Cooling

Radiator System	60 Hz	50 Hz
Ambient temperature, °C (°F)*	40 (104)	
Engine water capacity, L (gal.)	200 (53)	
Radiator system capacity, including engine, L (gal.)	598 (158)	
Charge cooler water flow, Lpm (gpm)	583 (154)	500 (132)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	700 (39808)	630 (35859)
Heat rejected to charge cooling water at rated kW, dry exhaust, kW (Btu/min.)	500 (28435)	340 (19353)
Water pump type	Centrifugal	
Fan diameter, including blades, mm (in.)	2057 (81)	
Fan, kWm (HP)	47 (63)	26 (35)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H <sub>2</sub> O)	0.125 (0.5)	

High Ambient Radiator System	60 Hz	50 Hz
Ambient temperature, °C (°F)*	50 (122)	
Engine water capacity, L (gal.)	200 (53)	
Radiator system capacity, including engine, L (gal.)	738 (195)	
Engine jacket water flow, Lpm (gpm)	1117 (295)	933 (247)
Charge cooler water flow, Lpm (gpm)	583 (154)	500 (132)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	700 (39808)	630 (35859)
Heat rejected to charge cooling water at rated kW, dry exhaust, kW (Btu/min.)	500 (28435)	340 (19353)
Water pump type	Centrifugal	
Fan diameter, including blades, mm (in.)	2743 (108)	
Fan, kWm (HP)	43 (57)	37 (50)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H <sub>2</sub> O)	0.125 (0.5)	

\* Enclosure with enclosed silencer reduces ambient temperature capability by 5°C (9°F).

Remote Radiator System†	60 Hz	50 Hz
Connection sizes:	Class 150 ANSI Flange	
Water inlet/outlet, mm (in.)	191 (7.5)	Bolt Circle
Intercooler inlet/outlet, mm (in.)	152 (6.0)	Bolt Circle
Static head allowable above engine, kPa (ft. H <sub>2</sub> O)	149 (50)	

† Contact your local distributor for cooling system options and specifications based on your specific requirements.


## Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, m <sup>3</sup> /min. (scfm)‡	2081 (73500)	1736 (61300)
High ambient radiator-cooled cooling air, m <sup>3</sup> /min. (scfm)‡	2849 (100600)	2129 (75200)
Cooling air required for generator set when equipped with CWC or remote radiator, based on 14°C (25°F) rise, m <sup>3</sup> /min. (scfm)‡	538 (19000)	
Combustion air, m <sup>3</sup> /min. (cfm)	144 (5085)	108 (3814)
Heat rejected to ambient air:		
Engine, kW (Btu/min.)	75 (4265)	
Alternator, kW (Btu/min.)	75 (4265)	

‡ Air density = 1.20 kg/m<sup>3</sup> (0.075 lbm/ft<sup>3</sup>).

Fuel Consumption	60 Hz	50 Hz
<b>Diesel, Lph (gph) at % load</b>	<b>Standby Rating</b>	
100%	469.0 (123.9)	405.0 (107.0)
75%	353.5 (93.4)	294.4 (77.8)
50%	245.8 (64.9)	204.6 (54.0)
25%	140.4 (37.1)	113.6 (30.0)
<b>Diesel, Lph (gph) at % load</b>	<b>Prime Rating</b>	
100%	422.2 (111.5)	358.9 (94.8)
75%	324.3 (85.7)	270.6 (71.5)
50%	226.5 (59.8)	186.9 (49.4)
25%	130.1 (34.4)	106.0 (28.0)

## Controllers

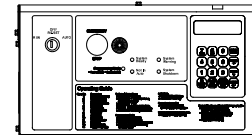


### Decision-Maker® 550 Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities.

- Digital display and keypad provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or modem configuration
- Controller supports Modbus® protocol
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-46 for additional controller features and accessories.

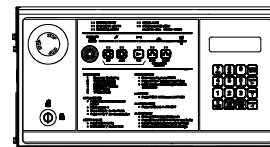

### Decision-Maker® 6000 Paralleling Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities for paralleling multiple generator sets.

- Paralleling capability with first-on logic, synchronizer, kW and kVAR load sharing, and protective relays
- Digital display and keypad provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or modem configuration
- Controller supports Modbus® protocol
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-107 for additional controller features and accessories.

## Standard Features

- Alternator Protection
- Closed Crankcase Breather System
- Customer Connection  
(standard with Decision-Maker® 6000 controller only)
- Local Emergency Stop Switch
- Low Coolant Level Shutdown
- Alternator Strip Heater (standard on 3300 volt and above)
- Oil Drain Extension
- Operation and Installation Literature
- Radiator Core Guard

## Available Options

### Approvals and Listings

- CSA Approval
- IBC Seismic Certification
- UL 2200 Listing

### Enclosed Unit

- Sound Enclosure/Fuel Tank Package
- Weather Enclosure/Fuel Tank Package

### Open Unit

- Exhaust Silencer, Hospital (60 Hz kit: PA-361626)
- Exhaust Silencer, Critical (60 Hz kit: PA-361625)
- Flexible Exhaust Connector, Stainless Steel

### Fuel System

- Flexible Fuel Lines
- Fuel/Water Separator

### Controller

- Common Failure Relay
- Communication Products and PC Software
- Customer Connection  
(Decision-Maker® 550 controller only)
- Decision-Maker® Paralleling System (DPS)  
(Decision-Maker® 6000 controller only)
- Dry Contact (isolated alarm)
- Prime Power Switch
- Remote Audiovisual Alarm Panel
- Remote Emergency Stop
- Remote Mounting Cable
- Remote Serial Annunciator Panel
- Run Relay

### Cooling System

- Block Heater; 12000 W, 208 V, 1 Ph
- Block Heater; 12000 W, 240 V, (Select 1 Ph or 3 Ph)
- Block Heater; 12000 W, 380 V, 3 Ph
- Block Heater; 12000 W, 480 V, (Select 1 Ph or 3 Ph)  
Recommended for Ambient Temperatures Below 15°C (60°F)
- High Ambient Radiator
- Remote Radiator Cooling Setup

### Electrical System

- Alternator Strip Heater (available up to 600 volt)
- Battery
- Battery Charger, Equalize/Float Type
- Battery Heater
- Battery Rack and Cables
- Line Circuit Breaker (NEMA type 1 enclosure)
- Line Circuit Breaker with Shunt Trip (NEMA type 1 enclosure)

### Paralleling System

- Manual Speed Adjust  
(Decision-Maker® 550 controller only)
- Remote Voltage Adjust Control  
(Decision-Maker® 550 controller only)
- Voltage Sensing (Decision-Maker® 6000 controller only)

### Miscellaneous

- Air Cleaner, Heavy Duty
- Air Cleaner Restriction Indicator
- Centrifugal Oil Filter (Prime Power only)
- Engine Fluids (oil and coolant) Added
- Rated Power Factor Testing
- Spring Isolators

### Literature

- General Maintenance
- NFPA 110
- Overhaul
- Production

### Warranty

- 2-Year Basic
- 2-Year Prime
- 5-Year Basic
- 5-Year Comprehensive
- 10-Year Major Components

### Other Options


- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

## Dimensions and Weights

Overall Size, L x W x H, max., mm (in.):

40°C Radiator 6436 x 2232 x 2564 (253.4 x 87.9 x 100.9)  
 50°C Radiator 6476 x 2766 x 3138 (255.0 x 108.9 x 123.5)

Weight 40°C Radiator, wet, max., kg (lb.): 14515 (32000)  
 50°C Radiator 14969 (33000)

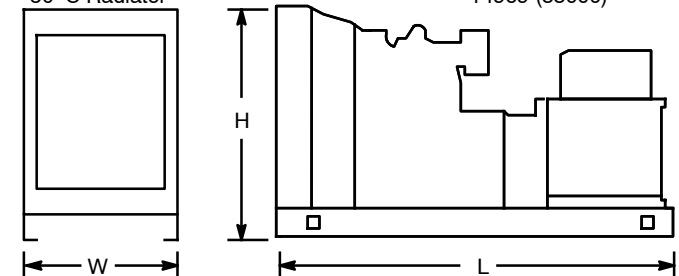

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

## DISTRIBUTED BY: